



QUICK CONNECT FTTA TERMINAL BOX





9 port FTTA fast connect fiber optic access terminal with 1x8 PLC optical splitter.

The NAP F/C-22 Fiber Access Termination Box can hold up to 8 subscribers.

It is used as a termination point for 1 ISP cable to connect with 1 OSP cable and 8 drop cables in the FTTx network system.

Integrates fiber cable splicing, splitting, storage, and management in one robust enclosure.

It is a mechanically sealed dome-style Fast Connect closure used on FTTx-ODN network access points.

It is a product with all input and output cables pre-connected, eliminating the need for fiber closure and splice opening.

All ports are equipped with hardened adapters.

Operators do not need to splice fibers or open boxes during ODN implementation, improving service provisioning efficiency and lowering total cost of operation.











PRODUCT INTRODUCTION:

The access terminal FTTA Fast Connect NAP provides 9 ports with 1X2 unbalanced and 1x8 normal PLC splitters.

The NAP Fiber Access Termination Box can hold up to 8 subscribers. It is used as a termination point for 1 ISP cable to connect with 1 OSP cable and 8 drop cables in the FTTx network system. Integrates fiber cable splicing, splitting, storage and management in one robust enclosure.

SPECS:

- Fully closed structure
- Material: PC+ABS, moisture proof, waterproof, dustproof, anti-aging, protection level up to IP67
- Plug-and-Play installation, easy to maintain and expand
- 10x Heavy Duty Drop Cable Adapters with Heavy Duty Connectors
- Compact Design Integrates Distribution, Splice, Split 3 in 1
- Designated position for 1:2 and 1:8 PLC splitter placement
- The box can be installed mounted on the wall or on a pole, suitable for both indoor and outdoor use.
- All our product Certified by ANATEL/CE/ROSH







FEATURES:

- Environmental Requirement: Working Temperature: -40°C~ +85°C; RH: ≤85%° (+30°c);pression atmospheric:**7**0KPa~106Kpa
- Fcheckyoutechnique major: Ploss of insertion: ≤0.15dB; Ploss of return CPU: ≥50dB;Ploss ofrreturn of APCs: ≥60dB

SETTING:

| Model | Description | Size L*W*H (mm) |
|------------------------|------------------|-----------------|
| NAP F/C-22 | Splitter Box | 210*204*88 |
| max capacity | Reinforced Ports | Ctn Size(cm) |
| 2 pcs 1xN PLC Splitter | 9 pcs | 46*46*57 |










PRODUCT DESCRIPTION:

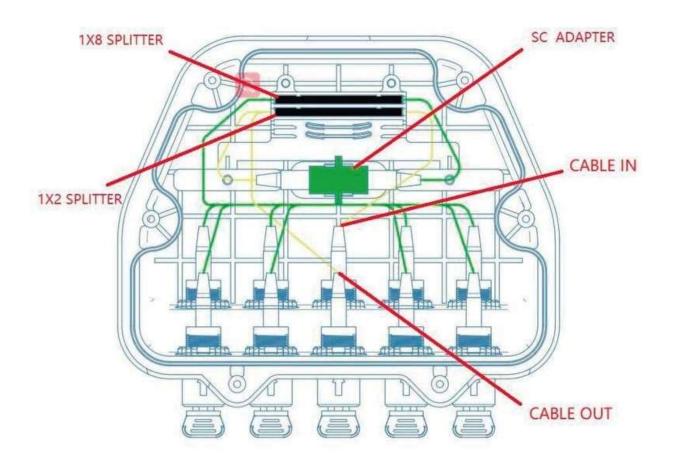








DIFFERENT VIEWS AND SIZES



FACILITY:

This NAP box supports wall mount and pole mount installation ways

